


Electr-O-Fuze™ EF Fittings, UL971 Listed

Product Description

Electr-O-Fuze™ EF fittings are safe and reliable proven electrofusion technology using open wire principles. Electr-O-Fuze™ EF couplers are the only fittings used in petroleum industry to also be tested and approved for use with natural gas and low pressure gas, thus providing unparalleled quality and protection. When used in conjunction with Electr-O-Fuze™ pipe and an Electr-O-Fuze™ EF welding machine, it provides a UL971 compliant fuel installation with a 30 year life span.

Electr-O-Fuze™ EF fittings are available in sizes from ½” to 30” nominal bore. Elbows and Tees in sizes up to and including 6” are available as an electrofusion fitting, while larger sizes are only obtainable in spigot fittings, requiring an electrofusion coupler on either side of the fitting.

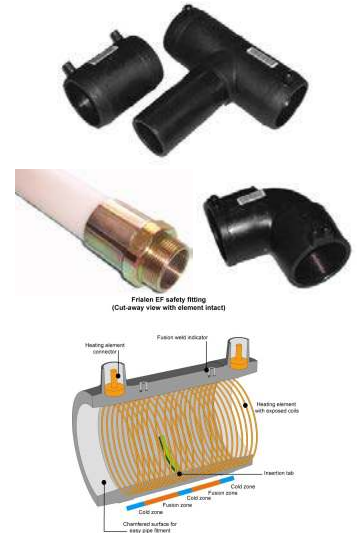

Applications

- | | |
|---|--|
| <ul style="list-style-type: none"> ○ Service Stations ○ Marinas ○ Fuel Terminals ○ Moist & Marshy Areas | <ul style="list-style-type: none"> ○ Refineries ○ Harbors ○ Airports ○ Non-Contaminated & Contaminated Sites |
|---|--|

Specifications

- | | |
|--|---|
| <ul style="list-style-type: none"> ○ Fitting Type: | <p>Matched electrofusion fittings are utilized throughout the pipeline system in order to join the various pieces. Deep sockets and ‘safe’ low voltage operation (42V), applied through dedicated ancillary equipment ensures maximum joint integrity. Fusion indicators monitor the joint melt pressure, while absolute security of the weld is ensured using the fittings bar code feature in conjunction with the fully automatic Electr-O-Fuze™ EF welding machine.</p> |
| <ul style="list-style-type: none"> ○ Electrofusion Machine: | <p>Electr-O-Fuze™ EF welding machine with memory, bar code reader, printing and error reporting.</p> |
| <ul style="list-style-type: none"> ○ Temperature Range: | <p>Fittings can be worked with at ambient temperatures between –24°F and 160°F.</p> |
| <ul style="list-style-type: none"> ○ Pipe Fusion Range: | <p>The fittings can be fused to pipe of SDR stages 17.6 to 7.4 in accordance with DIN 8074 (E), ISO 4437, pr EN 1555 and DIN EN 12201 (E).</p> |
| <ul style="list-style-type: none"> ○ Operating Pressures: | <p>150 psi.</p> |
| <ul style="list-style-type: none"> ○ Test Pressure: | <p>232 psi.</p> |
| <ul style="list-style-type: none"> ○ Approved Fuel Types: | <p>All Petroleum Products (<i>Motor Vehicle Fuels, High Blend Fuels, Concentrated Fuels, Aviation & Marine Fuels</i>) E85 and Biodiesel.</p> |

Installation

Installation, use, and maintenance of all Electr-O-Fuze™ products shall be in accordance with the manufacturer’s recommendations, State and County approvals. In event of conflicts, the stricter requirement shall govern. AEP installation manual available directly from AEP, or at info@aep-inc.net. All operators to be AEP certified on both the fittings and electrofusion machine.

Certifications/Approvals

- | | |
|---|---|
| <ul style="list-style-type: none"> ○ UL 971 Approved ○ Institute of Petroleum ○ Shell Int. Procurement Cert. ○ State of Florida ○ State of Michigan ○ New York City Fire Dept. ○ DOT 192 and 195 ○ DVGW Permit ○ Factory Permit ○ State of California | <p>File # MH47372
 Cert # BC63/1010/98/001 And cert # BC63/0115/2000/001
 Cert # BC63/1010/98/002
 EQ 683 and EQ 617 – and Derm Approval
 MUSTR – Rule 9, subsections 280.20 (b)
 CoA 5117
 On waiver letter per project
 VP 607, with decisions DV-8601AU2248, DV-8606AU2249 and DV-8611AU2250
 DIN EN 10 204-3.1
 CARB, State Fire Marshall Cert # GVRC 005:060:001</p> |
|---|---|